

**Docket No.: 1509-469**

**PATENT**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of	:	
	:	
Wassim HADDAD	:	
	:	
U.S. Patent Application No.	:	Group Art Unit:
	:	
Filed:	:	Examiner:
	:	
For: WIRELESS LAN		

**CLAIM OF PRIORITY AND**  
**TRANSMITTAL OF CERTIFIED PRIORITY DOCUMENT**


Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

Dear Sir:

In accordance with the provisions of 35 U.S.C. 119, Applicant hereby claims, in the present application, the priority of United Kingdom Patent Application No. 0300951.1, filed January 16, 2003. The certified copy is submitted herewith.


Respectfully submitted,

**LOWE HAUPTMAN GILMAN & BERNER, LLP**

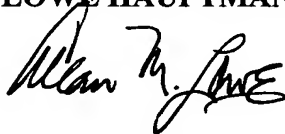

Allan M. Lowe  
Registration No. 19,641

1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314  
(703) 684-1111 AML/pjc  
Facsimile: (703) 518-5499  
**Date: October 30, 2003**

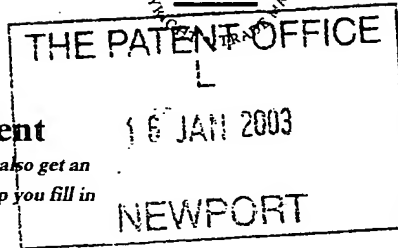

16JAN03 E777443-1 D01463  
P01/7700 0.00-0300951.1

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference 300200275-1 GB

2. Patent application number  
(The Patent Office will fill in this part)

0300951.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Hewlett-Packard Company  
3000 Hanover Street  
Palo Alto  
CA 94304, USA

Patents ADP number (if you know it)

Delaware, USA

If the applicant is a corporate body, give the country/state of its incorporation

496588004

4. Title of the invention Wireless LAN

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Richard A. Lawrence  
Hewlett-Packard Ltd, IP Section  
Filton Road, Stoke Gifford  
Bristol BS34 8QZ

Patents ADP number (if you know it)

7448038001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Yes

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	7
Claim(s)	3
Abstract	1
Drawing(s)	1

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	1
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	

Fee Sheet

11.

I/We request the grant of a patent on the basis of this application.

Signature

Richard A. Lawrence

Date

15/1/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Meg joyce Tel: 0117-312-9068

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 13 October 2003

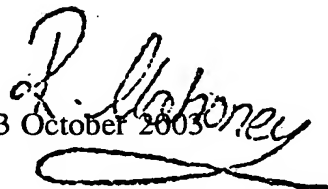

P506038GB

### Wireless LAN

This invention relates to a wireless LAN, and in particular to a method of, and apparatus for, increasing the quality of service (QoS) in a wireless LAN.

5

A wireless LAN can use any one of a number of known wireless technologies, such as 802.11a, 802.11b, Hiperlan/2, Bluetooth or Home RF. The choice of technology used depends on a number of parameters. Where, however, QoS is an important factor, it is usual to use 802.11a. Hiperlan/2 would be the preferred choice of wireless technology,  
10 but this technology is currently unavailable. Some of these different technologies operate at 5GHz (e.g 802.11a), and some operate at 2.4GHz (e.g 802.11b), and each operates at a different rate.

In a communications system, such as one operating using any one of the wireless  
15 technologies mentioned above, a hot spot is an area of high bandwidth connectivity, that is to say an area in which high bandwidth connections can be made. Clearly, the QoS in a hot spot will depend upon the bandwidth of the access point providing service, the number of users requiring service, and their QoS requirements. Generally speaking, there are three classes of service - class A (best quality) which requires a large  
20 bandwidth, class B (good quality) which requires a medium bandwidth, and class C (poor quality) which requires a lower bandwidth. Clearly, where an access point is providing class A service to a number of users, there is a danger that the entire bandwidth of that access point will be used, in which case any additional user entering the hot spot will receive no service. Alternatively, the QoS of each of the original users  
25 will be reduced to accommodate the new user.

An aim of the invention is to increase the QoS of a wireless LAN, particularly in a hot spot.

30 The present invention provides a wireless LAN comprising an access point, a plurality of mobile communications devices requiring data communication with the access point,

and control means for controlling the supply of data communication to the mobile communications devices, the control means being such as to set up a peer-to-peer connection between a first mobile communications device already receiving a data communication supplying a given service and a second mobile communications device  
5 requiring that service.

In a preferred embodiment, a software agent associated with the access point constitutes the control means.

10 Advantageously, the access point is provided with a plurality of wireless technologies for data communication with mobile communications devices, and preferably the wireless technologies include 802.11a, 802.11b, Hiperlan/2, Bluetooth and Home RF. In this case, the software agent may be such as to provide data communications to a given mobile communication device using a wireless technology appropriate to the QoS  
15 required by that mobile communications device.

Preferably, the control means is such as to control the peer-to-peer connection between the first and second mobile communications devices so as to provide the second mobile communications device with the given service from the first mobile communications  
20 device using a wireless technology appropriate to the QoS required by the second mobile communications device.

In a preferred embodiment, the control means is such as to register the second mobile communications device with an SIP server associated with the access point by  
25 providing that device with an SIP address, whereby that device can subsequently set up the peer-to-peer connection with the first mobile communications device using SIP messages.

The invention also provides a method of increasing the QoS of a wireless LAN  
30 comprising an access point and a plurality of mobile communications devices, the method comprising the steps of:-

a) providing data communications from the access point to a plurality of mobile communications devices at a respective QoS requested by each mobile communications device until the transmission bandwidth ceiling of the access point is reached; and

5        b) setting up a peer-to-peer connection from one of the said mobile communications devices to an additional mobile communications device requesting a data communication providing the same service as that provided to said one mobile communications device by the access point.

10      Preferably, step b) is such that the additional mobile communications device receives said data communication from said one mobile communications device at a QoS requested by the additional mobile communications device or at the highest QoS available from said one mobile communications device.

15      Advantageously, the access point is provided with a plurality of wireless technologies for data communication with mobile communications devices, the method further comprising the step of choosing the appropriate wireless technology for data communications from the access point to the mobile communications devices for the QoS requested by said devices. Conveniently, each of the mobile communications  
20      devices is provided with a plurality of wireless technologies for data communication, the method further comprising the step of selecting the best wireless technology for a peer-to-peer connection from a given one of the said mobile communications device to the additional mobile communications device in dependence upon the QoS requested by said additional mobile communications device.

25      In a preferred embodiment, the method further comprises the step of registering said additional mobile communications device with an SIP server associated with the access point so that said additional mobile communications device is supplied with an SIP address, the provision of the SIP address enabling communication between the  
30      additional mobile communications device and the SIP server and between the additional mobile communications device and said one mobile communications device

in order to set up the peer-to-peer connection between said two mobile communications devices.

Preferably, communication between said mobile communication devices in setting up  
5 the peer-to-peer connection is conducted using SIP messages. Advantageously, registration of said additional mobile communications device with the SIP server is achieved using DHCP.

The invention will now be described in greater detail, by way of example, with  
10 reference to the drawing, the single figure of which is a schematic representation of a wireless LAN constructed in accordance with the invention.

Referring to the drawing, a service provider network 1 is constituted by three access  
points P1, P2 and P3 which are hard wired together. The service provider network 1 is  
15 connected to the Internet 2 by any suitable interface. Each of the access points P1, P2 and P3 acts as a service provider for groups of users, such as the groups G1 and G2 associated with the access points P1 and P2. Where each of the groups G1 and G2 requires high bandwidth connectivity, a hot spot is created. Each of the users has a  
mobile communications device such as a laptop computer, a personal digital assistant  
20 (PDA) or a 2G/3G mobile phone enabled with one or more of the wireless technologies mentioned above.

Each of the access points P1 to P3 is provided with means for data communication  
using each of the wireless technologies 802.11a, 802.11b, Hiperlan/2, Bluetooth and  
25 Home RF. Accordingly, each of the access points P1 to P3 can communicate with the mobile communications device having any of these wireless technologies.

In a simple wireless LAN of the type shown in the drawing, each of the access points  
P1 to P3 may have a bandwidth which can supply only one user with class A service. If  
30 a user having a mobile communications device 3a in the group G1 requires class A service, for example to watch a football match transmission available from a service provider, that user will take all the bandwidth of the access point P1. Accordingly,



other users having mobile communications devices 3b, 3c and 3d within the group G1 will be unable to receive service from the access point P1 unless the QoS supplied to the user of the device 3a is reduced.

5 The wireless LAN of the invention overcomes this difficulty by providing a software agent A1, A2 and A3 at each of the access points P1, P2 and P3. Thus, the software agent A1 is configured to set up a peer-to-peer (P2P) connection between the device 3a and one or more of the devices 3b to 3d, so that the same service can be supplied to the or each of those devices. This P2P connection can be initiated by each of the devices  
10 3b to 3d using the session initiation protocol (SIP). Any mobile device entering the network served by the access point P1 is registered with an associated local SIP server (not shown), which allocates the device an SIP address that is used for communicating with the device whilst in the network. Registration is achieved using Dynamic Host Configuration Protocol (DHCP), and the SIP server and the mobile device can then  
15 exchange SIP messages which comprise an address header and a text field. The text field is used to identify the services required by that mobile device, and to set up P2P connection between that device and any other device in the network using the wireless technology available between those devices. Communication between mobile devices in setting up a P2P connection will also be conducted using SIP messages.

20

SIP is preferred because it operates at the application level of the system, and supports instant messaging using the text field of SIP messages. Therefore, the invention, in controlling the supply of data as between the access points P1 to P3 and the mobile devices, can be application specific, and can be made rapidly responsive to user  
25 requests. P2P connections between mobile devices can, therefore, be set up seamlessly.

Where only a single one of the devices 3b to 3d requires the service, this can be supplied to each at class A service. On the other hand, if all three of the devices 3b to 3d require the service, this will be supplied at a lower class of service, thereby  
30 providing the service to those devices at a lower QoS. In this way, the access point P1 can provide service to a greater number of users than would be the case if service had to be provided directly to each of the users. Any suitable wireless technology can be used

for P2P connections, though Hiperlan/2 is preferred when high QoS is required by an additional user. In many cases, however, Bluetooth will be the preferred wireless technology. It would also be possible for an additional user to access say the device 3a via the mobile communications device of an intermediate user not wanting the service provided to the device 3a, using a short-range wireless technology such as Bluetooth.

The software agent A1 is configured for charging for services provided. For example, if the device 3b requires the same service supplied to the device 3a, the software agent will set up a charging procedure which will charge the user of the device 3b with two charges, one to the service provider of the service, and the other to the user of the device 3a. In practice, this latter charge may be effected by reducing the charge made by the service provider to the user of the device 3a.

This fanning out of service provision could be further enhanced by using a "second tier" device such as the device 3b to provide service to a further device (not shown). In this case, the further device would use SIP to contact the access point P1 which would then initiate P2P communication from the device 3b to the additional device. In this connection, it should be noted that any mobile communications device entering the network served by the access point P1 would be supplied with an SIP address. The software agent A1 can then monitor the network supplied by the access point P1 to ascertain the load on the main network, and the load on each mobile communications device being used to transmit a service supplied thereto by the access point to an additional mobile communications device.

In a practical wireless LAN of this type, each of the access points P1 to P3 will have a bandwidth considerably in excess of that necessary to supply a single user with class A service, and so can provide high QoS to a plurality of users. Each of those users could be supplied with a different service, so that additional users requiring any one of those services could be provided with that service via the user originally supplied with that service.

Obviously, where the access point P1 is operating at maximum bandwidth, service can only be provided to new users via an existing user if the service required by that new user is one already being provided to an existing user.

- 5 The service agents A1 to A3 will be configured to provide services on the wireless technology best suited to the QoS required by any given user. For high QoS requirements, 802.11a will normally be used, though 802.11b may be preferred where conservation of battery power of the user is an important factor. As mentioned above, Hiperlan/2 would be the preferred choice of wireless technology, but this technology is  
10 currently unavailable.

- The wireless LAN of the invention ensures that both a service provider and users asking for a high QoS will be able to benefit from other users asking for lower classes of QoS. Moreover, the wireless LAN of the invention permits a substantial increase in the  
15 number of users that can be serviced. Thus, the service provider can supervise the available bandwidth for direct users, and to offer new connections, when needed, to other users, by establishing P2P sessions between direct users and those other users. This enables a service provider to become more competitive by attracting more users, whilst optimising the bandwidth and the variation of class of QoS provided.

**Claims**

1. A wireless LAN comprising an access point, a plurality of mobile communications devices requiring data communication with the access point, and control means for controlling the supply of data communication to the mobile communications devices, the control means being such as to set up a peer-to-peer connection between a first mobile communications device already receiving a data communication supplying a given service and a second mobile communications device requiring that service.
2. A wireless LAN as claimed in claim 1, wherein a software agent associated with the access point constitutes the control means.
3. A wireless LAN as claimed in claim 1 or claim 2, wherein the access point is provided with a plurality of wireless technologies for data communication with mobile communications devices.
4. A wireless LAN as claimed in claim 3, wherein the wireless technologies include 802.11a, 802.11b, Hiperlan/2, Bluetooth and Home RF.
5. A wireless LAN as claimed in claim 3 or claim 4, wherein the software agent is such as to provide data communications to a given mobile communication device using a wireless technology appropriate to the QoS required by that mobile communications device.
6. A wireless LAN as claimed in any one of claims 1 to 5, wherein the control means is such as to control the peer-to-peer connection between the first and second mobile communications devices so as to provide the second mobile communications device with the given service from the first mobile communications device using a wireless technology appropriate to the QoS required by the second mobile communications device.

7. A wireless LAN as claimed in claim 6, wherein the control means is such as to register the second mobile communications device with an SIP server associated with the access point by providing that device with an SIP address, whereby that device can subsequently set up the peer-to-peer connection with the first mobile communications device using SIP messages.
8. A method of increasing the QoS of a wireless LAN comprising an access point and a plurality of mobile communications devices, the method comprising the steps of:-
- a) providing data communications from the access point to a plurality of mobile communications devices at a respective QoS requested by each mobile communications device until the transmission bandwidth ceiling of the access point is reached; and
  - b) setting up a peer-to-peer connection from one of the said mobile communications devices to an additional mobile communications device requesting a data communication providing the same service as that provided to said one mobile communications device by the access point.
9. A method as claimed in claim 8, wherein step b) is such that the additional mobile communications device receives said data communication from said one mobile communications device at a QoS requested by the additional mobile communications device or at the highest QoS available from said one mobile communications device.
10. A method as claimed in claim 8 or claim 9, wherein the access point is provided with a plurality of wireless technologies for data communication with mobile communications devices, the method further comprising the step of choosing the appropriate wireless technology for data communications from the access point to the mobile communications devices for the QoS requested by said devices.
11. A method as claimed in claim 10, wherein each of the mobile communications devices is provided with a plurality of wireless technologies for data communication, the method further comprising the step of selecting the best wireless technology for a peer-to-peer connection from a given one of the said mobile communications device to

the additional mobile communications device in dependence upon the QoS requested by said additional mobile communications device.

12. A method as claimed in any one of claims 8 to 11, further comprising the step  
5 of registering said additional mobile communications device with an SIP server associated with the access point so that said additional mobile communications device is supplied with an SIP address, the provision of the SIP address enabling communication between the additional mobile communications device and the SIP server and between the additional mobile communications device and said one mobile  
10 communications device in order to set up the peer-to-peer connection between said two mobile communications devices.

13. A method as claimed in claim 12, wherein communication between said mobile communication devices in setting up the peer-to-peer connection is conducted  
15 using SIP messages.

14. A method as claimed in claim 12 or claim 13, wherein registration of said additional mobile communications device with the SIP server is achieved using DHCP.

